caprari
pumping power

Caprari Model D3/65 PTO Pump
Model Information

Fully-Fitted D3/65 Pictured

- **Compact, reliable PTO pump capable of 150 to 530 gpm with corresponding pressures of 161 to 131 psi using 29 to 59 hp**
- **Available with heavy duty two wheeled trailer or galvanized three point mount**
- **Designed with industry leading oil lubricated step up gearbox (no belts or pulleys) with shafts supported by widely spaced bearings**
- **Easily replaceable packing gland type water seal**
- **Pumps can be fitted with 4" female thread discharge priming valve, hand primer, fluid filled pressure gauge, short suction adapter with 4" female pipe thread and #6 heavy duty 1 3/8 six spline PTO shaft**

Technical Specifications	
Discharge & Suction	(Bare or Pump, Cart & Shaft) Flanged
Discharge & Suction	(Fully Fitted) 4" NPT (F)
Discharge Position	Horizontal, Right Facing (When Standing Behind The Suction End)
Length	65 Inches
Width	48 Inches
Height	40 Inches
Weight (Unfitted)	270 lbs.
Weight (Fitted)	330 lbs.
Configurations	
Bare Pump	Pump only with weld-on companion flanges, gaskets, nuts & bolts
Pump, Cart & Shaft	Same as bare pump, but mounted on two-wheeled cart & PTO drive shaft
Fully Fitted	Sames as pump, cart & shaft plus hand primer, check valve, pressure gauge and suction fittings

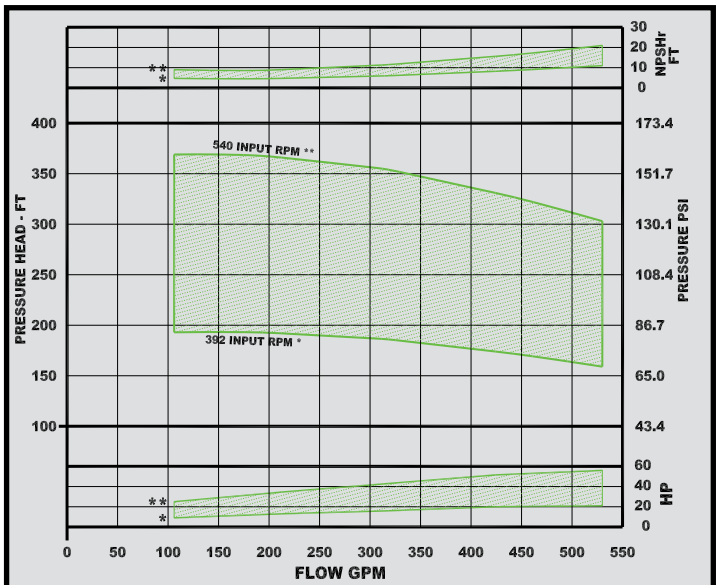

PTO Input - 540 RPM

GPM	150	250	350	450	530
PSI	161	156	151	142	131
HP	29	38	46	53	59

The performance information contained herein in based on ideal conditions. Actual performance is affected by, but not limited to, location, operating conditions (Temperature, humidity & altitude) and human judgement. Idrofoglia USA reserves The right to change product specifications, designs, pricing and standard equipment Without notice and without incurring obligation.